

SUCCESS STORY




Wood K plus
WOOD: Transition to a sustainable bioeconomy

Programme: COMET – Competence Centers for Excellent Technologies

Programme line: BMK, FFG-production for future

Type of project: Duration
01.04.2021 – 31.10.2023,
multi-firm



PRODUCTION OF BIO-BASED RESOLS FROM STRUCTURE DEFINED LIGNIN OLIGOMERS (LIGNOWERT)

IN THE LIGNOWERT PROJECT, WOOD K PLUS TOGETHER WITH THE TU VIENNA AND THE INDUSTRIAL PARTNERS DEVELOPED BIO-BASED PHENOL BUILDING BLOCKS FROM THE BIORAFINERY PRODUCTS LIGNIN AND LIGNOSULFONATES AND WAS SUCCESSFULLY PRODUCING BIO-BASED BINDERS


Phenol from petroleum fractionation is a basic chemical for the production of phenolic resins. Phenol is reacted with aldehydes under alkaline or acidic conditions. The three-dimensional network of the cured polymer is responsible for the high chemical and thermal resistance and the good mechanical properties. Phenols are found in abrasives, friction, and other engineering applications such as foaming or high temperature applications, in addition to some wood composites or insulation products. For this reason, thermoset polymers were developed from

the bio-based building blocks phenols, lignin and lignosulfonate for use as binders. The thermoset polymers were developed along the value chain from organosolv lignin and kraft lignin as well as lignosulfonate as a side stream of pulp production. The key was the use of radical scavengers for hydrothermal degradation and simultaneous modification of the lignins. The modified lignins were characterised using FT-IR, DSC, 31P-NMR. The lignins obtained were used in resin production both alone and in combination with lignosulfonates. A standard

SUCCESS STORY

recipe for classic phenolic resin production was tested. In the case of modified lignins, up to 80% petrochemical phenol could be replaced and in the case of lignosulfonate, 100% phenol could be replaced. In the resin production process, the modified lignins show a higher reactivity compared to unmodified lignin. The undesirable effect of very high

viscosity and long curing times for lignosulfonate resins, known in resin chemistry, could be overcome by combining them with the new modified lignins and moderate viscosities and curing times could be achieved. The molecular weights, melting behavior and thermogravimetry of the resins were also determined.

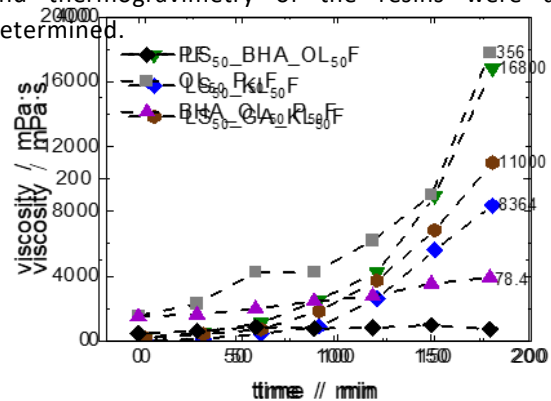

Viscosity curves of lignin-formaldehyde resins

Left: Phenol-formaldehyde resin (black), 50% substitution of phenol by organosolv lignin (OL) (gray) and BHA modified OL (purple),

Right: Phenol substitution by 50% lignosulfonate and (1) BHA modified OL (green), (2) kraft lignin (blue) and (3) gallic acid modified kraft lignin (brown)

Impacts and effects

The project contributes to the economic and ecological provision of bio-based resins from the biorefinery products lignin and lignosulfonate. By linking lignin production and direct modification, a gap in the value chain of producing environmentally friendly binders is closed.



Phenolic resins as versatile binders (© Photo: E. Fliedner, Prefere)

Project coordination (Story)

Birgit Kamm, PhD

Key Researcher

Wood K plus, Linz

T +43 732 2468 – 6773

b.kamm@wood-kplus.at

Wood K plus

Kompetenzzentrum Holz GmbH

Altenberger Straße 69

4040 Linz

T +43 732 2468 – 6750

zentrale@wood-kplus.at

www.wood-kplus.at

Project partner

• TU Vienna, Austria

• Lenzing AG, Austria

• Prefere Resins GmbH, Germany

This success story was provided by the center management and by the mentioned project partners for the purpose of being published on the FFG website.

Wood K plus is a COMET Center within the COMET – Competence Center for Excellent Technologies Programme and funded by BMK, BMAW and the provinces of Carinthia, Lower Austria and Upper Austria. The COMET Programme is managed by FFG. Further information on COMET: www.ffg.at/comet